


VERTICAL BAR POSITIONER

STANDARD 9 GAGE WITH MILL GALVANIZED FINISH—LOCATE AT TOP OF 1ST COURSE. 1 COURSE BELOW TOP OF WALL WITH A MAXIMUM 200 VERTICAL BAR DIAMETERS. ALLOWS POSITION BAR AT CENTER OF WALL OR EITHER SIDE OF CAVITY. STANDARD SIZES FIT 8" AND 12" BLOCK—OTHER SIZES ON REQUEST.

THEY CAN BE FABRICATED TO POSITION DOUBLE VERTICAL BARS AND/OR DOUBLE HORIZONTAL BARS. REQUIRED FOR REINFORCED MASONRY BY UNIFORM BUILDING CODE AND MSJC.

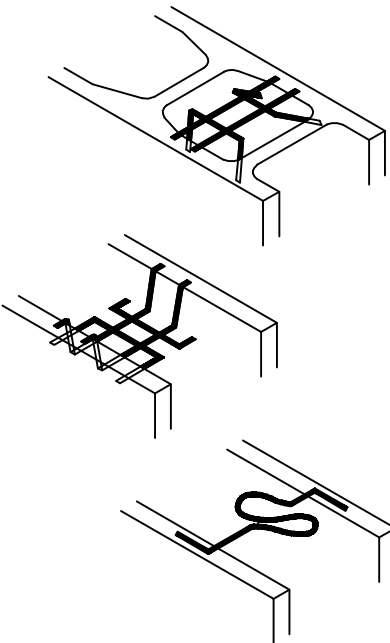

THIS DETAIL AS SHOWN IS INTENDED TO ILLUSTRATE A GENERAL CONCEPT OR METHOD OF CONSTRUCTION. DETAILS THAT SHOW DIFFERENT OR MODIFIED CONCEPTS OR METHODS CAN BE OF EQUAL VALIDITY AND SHOULD NOT BE EXCLUDED FROM CONSIDERATION. THIS DETAIL SHALL NOT BE USED FOR CONSTRUCTION WITHOUT THE APPROVAL AND SIGNATURE OF A LICENSED DESIGN PROFESSIONAL. THE PERSON USING THIS DETAIL SHALL BE RESPONSIBLE FOR ITS COMPLETE DESIGN AND PROPER APPLICATION.

FIGURE 2 SAMPLE BAR POSITIONERS