



4-Flute Split Face




8x8x16
4-Flute Split 1-Side



12x8x16
4-Flute Split 1-Side

4-Flute Split
Running Bond

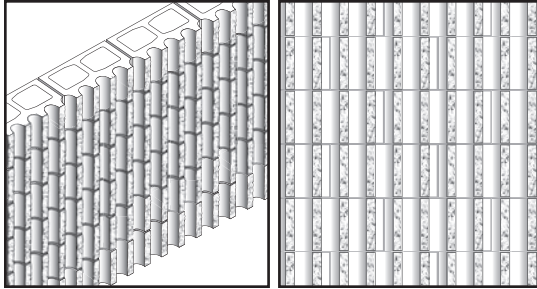

Aggregate exposure in all deep scored and fluted units will vary across the unit face, but is not discernable when viewing the entire field.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com

Features

Narrow flutes and deep, rounded indentations create a profile and texture that changes with the angle of the sun. Split flutes reveal the aggregate matrix for a randomly surfaced, hewn look.

Add relief and depth of texture to fields and bands; create visual anchoring to lower elevations or striking accent to top of walls.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. Units can be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at AngelusBlock/CarbonKind.



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.