



# 4-Score 2x1 Precision

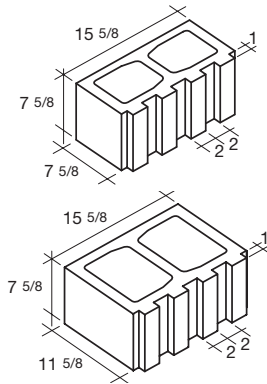

**8x8x16**  
**4-Score 2x1**

**12x8x16**  
**4-Score 2x1**  
May be limited in plant location.

4-Score 2x1  
Running Bond

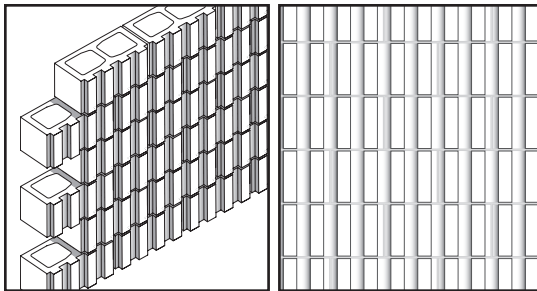

Cells and web configurations as shown are representational only, and actual configurations may differ.

**Corporate Office & Plants:**

11374 Tuxford St.  
Sun Valley, CA 91352  
(818) 767-8576

Orange, CA  
Fontana, CA  
Gardena, CA

Oxnard, CA  
Indio, CA  
Bakersfield, CA

[www.AngelusBlock.com](http://www.AngelusBlock.com)

[info@AngelusBlock.com](mailto:info@AngelusBlock.com)

## Features

Equally spaced projections and 1-inch deep scores create a ribbed effect.

Add relief and depth of texture to fields and bands; create visual anchoring to lower elevations or striking accent to top of walls.

## Availability

**Special order only.** Configurations such as open ends and open end bond beams may be available. Units can be made in any of our integral colors.

## Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

## Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

## Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at [www.AngelusBlock.com](http://www.AngelusBlock.com).



This is a low impact CarbonKind™ product which substantially reduces CO<sub>2</sub>e. Learn more at [AngelusBlock/CarbonKind](http://AngelusBlock/CarbonKind).



**WARNING:** This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).