


# 6x8x16 Shotblast CMU

#### **CONCRETE MASONRY UNITS**

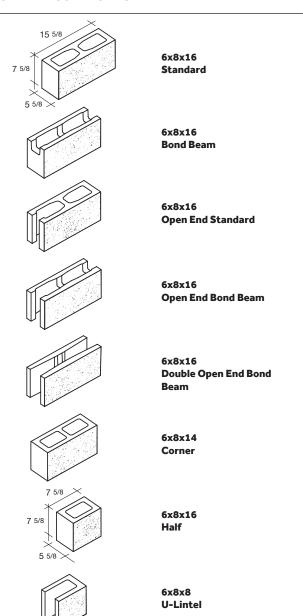

#### **Availability**

**Special order only.** Shotblast on multiple faces is available. Units can be made in any of our integral color options.

#### **Standards**

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

## Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

### **Sustainable Features**

- This product is included in Type III Environmental Product
  Declarations for Angelus Block Concrete Masonry Units, specific
  to location and mix designs, and in one of six Health Product
  Declarations, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

Degree of texturing of Shotblast units will vary from unit to unit.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.Orange, CAOxnard, CASun Valley, CA 91352Fontana, CAIndio, CA(818) 767-8576Gardena, CABakersfield, CA

www. Angelus Block. com

info@AngelusBlock.com



This is a low impact CarbonKind™ product which substantially reduces CO<sub>2</sub>e. Learn more at Angelus Block/CarbonKind.