



Hi-Lite Mark I


CONCRETE MASONRY UNITS




**6x8x16
Hi-Lite Mark I**
May be limited in plant location or color availability.



**8x8x16
Hi-Lite Mark I**




**10x8x16
Hi-Lite Mark I**
May be limited in plant location or color availability.




**12x8x16
Hi-Lite Mark I**

Hi-Lite Mark I
Running Bond

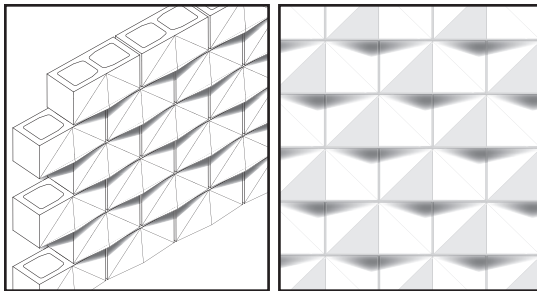

Hi-Lite Mark I
Stack Bond

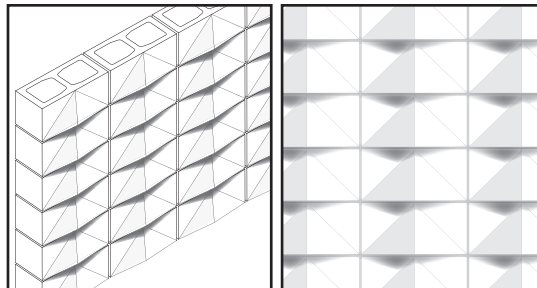

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:
11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com

Features

With an angular projection peaked along its vertical center, the Hi-Lite Mark I offers relief and shadow patterns that change with the angle of sunlight.

Popouts, angles, and overhangs enliven walls with contrasts of highlights and shade. Use them as individual units for accent, or in fields for pattern and texture.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. Units may be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at Angelus Block/CarbonKind.