



Projected Block Burnished



**8x8x16
Projected Block**



**12x8x16
Projected Block**
May be limited in plant location.

Features

Half the unit face projects outward 5/8-inch, creating popouts that enliven walls with contrasts of highlights and shadow. Use them as individual units for accent, or as fields in random or organized patterns.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. Units may be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating


Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features


- This product is included in Type III Environmental Product Declarations for Angelus Block Concrete Masonry Units, specific to location and mix designs, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable & Resilient Design: Angelus Block Products' Application to Rating Systems and Code* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

Projected Block
Burnished
Running Bond

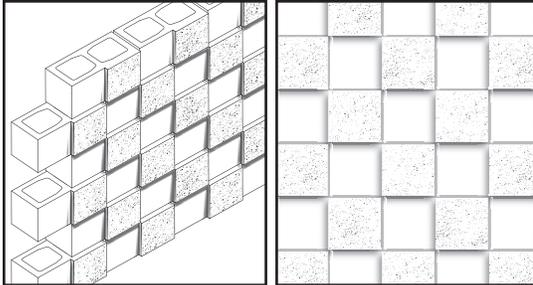

Projected Block
Burnished
Stack Bond

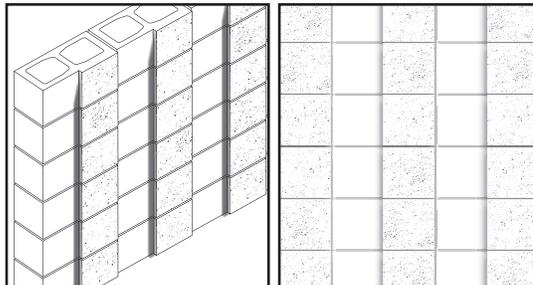

Aggregate exposure in all Burnished units will vary across the unit face, and from unit to unit.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Corporate Office & Plants:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

Orange, CA
Fontana, CA
Gardena, CA

Oxnard, CA
Indio, CA
Bakersfield, CA

www.AngelusBlock.com

info@AngelusBlock.com



This is a low impact CarbonKind™ product which substantially reduces CO₂e. Learn more at [Angelus Block/CarbonKind](http://AngelusBlock/CarbonKind).



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to www.P65Warnings.ca.gov.