



4-Score Split Face


CONCRETE MASONRY UNITS

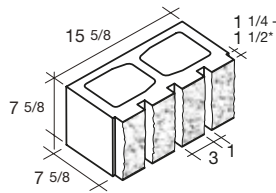


8x8x16
4-Score Split 1-Side




10x8x16
4-Score Split 1-Side
May be limited in plant location.

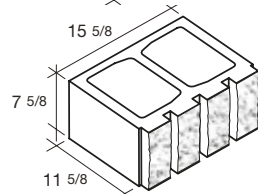

12x8x16
4-Score Split 1-Side

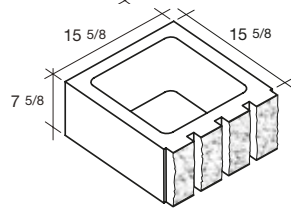


16x8x16 Ring
4-Score Split 1-Side



8x4x16
4-Score Split 1-Side
May be limited in plant location.

4-Score Split
Running Bond

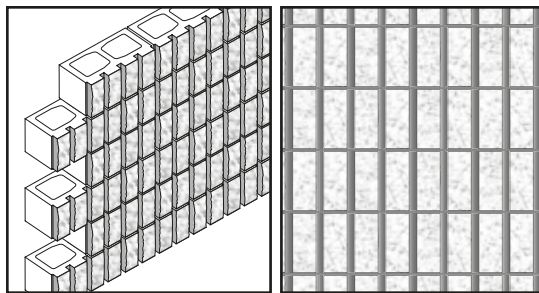

*Depth may differ by plant.
Aggregate exposure in all deep scored and fluted units will vary across the unit face, but is not discernable when viewing the entire field.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Features

Deep, narrow scores and a projected split face provide mass and accent with the character of inlaid stone.

Add relief and depth of texture to fields and bands; create visual anchoring to lower elevations or striking accent to top of walls.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. Multiple-sided units are available. Units can be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, 10-inch are 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in *Environmental Product Declaration for Angelus Block Concrete Masonry Units*, a Type III EPD, and in one of six *Health Product Declarations*, as applicable for its weight classification.
 - Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
 - Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.
- See *Sustainable Design & Angelus Block Products* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.
- Angelus Block Take-Back Program: Facilities and procedures for receiving and repurposing concrete masonry waste into recycled aggregates.

Contact your representative for more information.

www.AngelusBlock.com

info@AngelusBlock.com

Corporate Office & Plant:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

1705 N. Main St.
Orange, CA 92865
(714) 637-8594

11740 Sheldon St.
Sun Valley, CA 91352
(818) 768-0315

14515 Whittram Ave.
Fontana, CA 92335
(909) 350-0244

252 E. Redondo Bch. Bl.
Gardena, CA 90248
(310) 323-8841

4575 E. Vineyard Ave.
Oxnard, CA 93036
(805) 485-1137

88-100 Fargo Canyon Rd.
Indio, CA 92202
(760) 347-3245



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.