



6x8x16
Hi-Lite Mark II

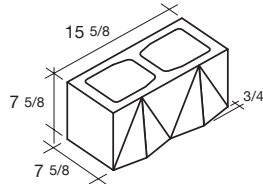


8x8x16
Hi-Lite Mark II

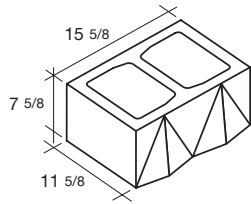

12x8x16
Hi-Lite Mark II

Hi-Lite Mark II
Running Bond

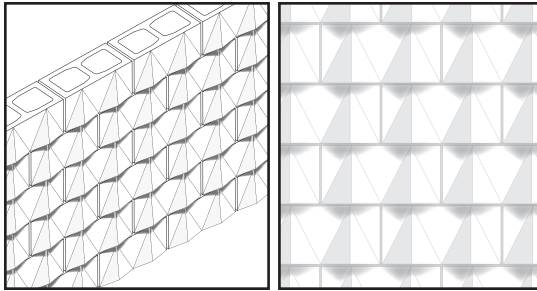

Cells and web configurations as shown are representational only, and actual configurations may differ.

Features

With two angular projections, the Hi-Lite Mark II offers strong relief and shadow patterns that change with the angle of sunlight.

Popouts, angles, and overhangs enliven walls with contrasts of highlights and shade. Use them as individual units for accent, or in fields for pattern and texture.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. This item may be limited in plant location. Units may be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in *Environmental Product Declaration for Angelus Block Concrete Masonry Units*, a Type III EPD, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable Design & Angelus Block Products* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

- Angelus Block Take-Back Program: Facilities and procedures for receiving and repurposing concrete masonry waste into recycled aggregates.

Contact your representative for more information.

www.AngelusBlock.com

info@AngelusBlock.com

Corporate Office & Plant:

11374 Tuxford St. Sun Valley, CA 91352 (818) 767-8576	1705 N. Main St. Orange, CA 92865 (714) 637-8594	11740 Sheldon St. Sun Valley, CA 91352 (818) 768-0315	14515 Whittram Ave. Fontana, CA 92335 (909) 350-0244	252 E. Redondo Bch. Bl. Gardena, CA 90248 (310) 323-8841	4575 E. Vineyard Ave. Oxnard, CA 93036 (805) 485-1137	88-100 Fargo Canyon Rd. Indio, CA 92202 (760) 347-3245
---	--	---	--	--	---	--



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.