




**4x8x16**  
Vertical Score 1-Side




**6x8x16**  
Vertical Score 1-Side




**8x8x16**  
Vertical Score 1-Side




**10x8x16**  
Vertical Score 1-Side



**12x8x16**  
Vertical Score 1-Side

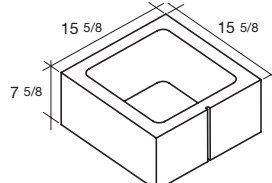


**16x8x16**  
Vertical Score 1-Side

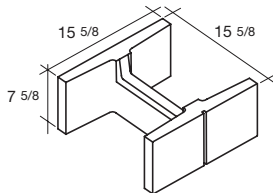

**16x8x16 Double Open End**  
Vertical Score 1-Side

Vertical Score  
Running Bond

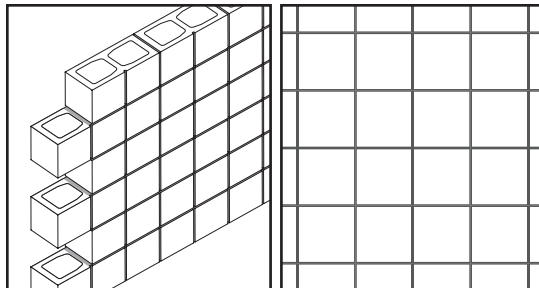

Cells and web configurations as shown are representational only, and actual configurations may differ.

## Features

A single vertical score mid-length, 3/8-in wide and deep, simulates a raked joint. For typical cmu with an 8-in by 16-in face, the effect is a grid of 8x8 squares that can effectively add accent or interest to the elevation.

## Availability

6-inch Vertical Score 2-Sides and 8-inch Vertical Score 1-Side may have limited in-stock availability. Otherwise, units are **special order** with one or two sides available. Stretcher units may be available in closed end, open end, and bond beam configurations. All units are available in any of our integral color options on special order.

## Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

## Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, and 12-inch wide units are 2 hours to 3 hours.

## Sustainable Features

- This product is included in *Environmental Product Declaration for Angelus Block Concrete Masonry Units*, a Type III EPD, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable Design & Angelus Block Products* for detailed information. A copy is available from your representative, or as a download at [www.AngelusBlock.com](http://www.AngelusBlock.com).

Contact your representative for more information.

[www.AngelusBlock.com](http://www.AngelusBlock.com)

[info@AngelusBlock.com](mailto:info@AngelusBlock.com)

### Corporate Office & Plant:

11374 Tuxford St.  
Sun Valley, CA 91352  
(818) 767-8576

1705 N. Main St.  
Orange, CA 92865  
(714) 637-8594

14515 Whittram Ave.  
Fontana, CA 92335  
(909) 350-0244

252 E. Redondo Bch. Bl.  
Gardena, CA 90248  
(310) 323-8841

4575 E. Vineyard Ave.  
Oxnard, CA 93036  
(805) 485-1137

88-100 Fargo Canyon Rd.  
Indio, CA 92202  
(760) 347-3245



**WARNING:** This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

©2019 Angelus Block Co., Inc.