



5-Score Precision CMU


CONCRETE MASONRY UNITS



8x8x16 5-Score
Special order.




10x8x16 5-Score
Special order.



12x8x16 5-Score
Special order.

5-Score
Running Bond

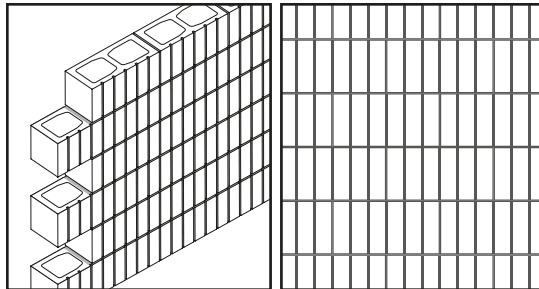

Features

Five vertical scores, 3/8-in wide and deep, simulate raked joints, and visually divide the face into three sections. The effect is a grid that can effectively add accent or interest to the elevation.

Availability

Special order only. Configurations such as open ends and open end bond beams may be available. May be limited in plant location. Units can be made in any of our integral color options.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, 10-inch are 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in *Environmental Product Declaration for Angelus Block Concrete Masonry Units*, a Type III EPD, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable Design & Angelus Block Products* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

- Angelus Block Take-Back Program: Facilities and procedures for receiving and repurposing concrete masonry waste into recycled aggregates.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Contact your representative for more information.

www.AngelusBlock.com

info@AngelusBlock.com

Corporate Office & Plant:

11374 Tuxford St. Sun Valley, CA 91352 (818) 767-8576	1705 N. Main St. Orange, CA 92865 (714) 637-8594	11740 Sheldon St. Sun Valley, CA 91352 (818) 768-0315	14515 Whittram Ave. Fontana, CA 92335 (909) 350-0244	252 E. Redondo Bch. Bl. Gardena, CA 90248 (310) 323-8841	4575 E. Vineyard Ave. Oxnard, CA 93036 (805) 485-1137	88-100 Fargo Canyon Rd. Indio, CA 92202 (760) 347-3245
---	--	---	--	--	---	--



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.