




6x4x16
Quik-Brik®

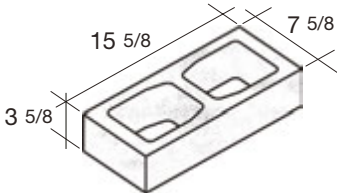

8x4x16
Quik-Brik®

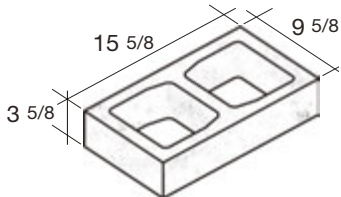

10x4x16
Quik-Brik®

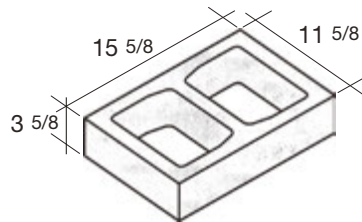

12x4x16
Quik-Brik®

NOTE: Quik-Brik are blended color products. As such, individual units will range from solid, single color to completely random blends of the base colors.

It is highly recommended to draw units from multiple pallets simultaneously to assure a good mix of colors in the wall field, and to avoid large areas of the same color.

Cells and web configurations as shown are representational only, and actual configurations may differ.

Features

Quik-Brik® offers the rich look of brick in the durable practicality of structural concrete masonry, and is the only product of its kind with a standardized, national color palette.

Single-wythe concrete masonry is an ideal design material - it's structural, economical, and available in beautiful finishes. Quik-Brik brings all of that plus the warmth and aesthetic of brick color variegation and scale.

Availability

Special order only. Available in closed end and open end configurations. Visit Colors & Textures at www.AngelusBlock.com for Quik-Brik color blends.

Standards

Concrete masonry units manufactured by Angelus Block Co., Inc. meet ASTM C90 Standard Specification for Loadbearing Concrete Masonry Units.

Fire Rating

Solid grouted walls 8-in wide and greater are rated at 4 hours, per CBC Table 721.1(2). For partially grouted walls, depending on the specified weight classification, 8-inch wide units are 1 hour to 2 hours, 10-inch are 2 hours, and 12-inch wide units are 2 hours to 3 hours.

Sustainable Features

- This product is included in *Environmental Product Declaration for Angelus Block Concrete Masonry Units*, a Type III EPD, and in one of six *Health Product Declarations*, as applicable for its weight classification.
- Contributes to green rating systems calculations, including Regional Materials, EPDs, and Material Ingredient Reporting.
- Angelus Block CMU help facilitate and support many more strategies and credits, including Optimize Energy Performance, Construction Waste Management, and several within Indoor Environmental Quality. Angelus Block CMU contain no VOCs.

See *Sustainable Design & Angelus Block Products* for detailed information. A copy is available from your representative, or as a download at www.AngelusBlock.com.

- Angelus Block Take-Back Program: Facilities and procedures for receiving and repurposing concrete masonry waste into recycled aggregates.

Contact your representative for more information.

www.AngelusBlock.com

info@AngelusBlock.com

Corporate Office & Plant:

11374 Tuxford St.
Sun Valley, CA 91352
(818) 767-8576

1705 N. Main St.
Orange, CA 92865
(714) 637-8594

11740 Sheldon St.
Sun Valley, CA 91352
(818) 768-0315

14515 Whittram Ave.
Fontana, CA 92335
(909) 350-0244

252 E. Redondo Bch. Bl.
Gardena, CA 90248
(310) 323-8841

4575 E. Vineyard Ave.
Oxnard, CA 93036
(805) 485-1137

88-100 Fargo Canyon Rd.
Indio, CA 92202
(760) 347-3245



WARNING: This product can expose you to Silica, crystalline (airborne particles of respirable size) which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.